



Alarm Check Valve, Vertical Trim Flange Ends, 300PSI

FIG · F1511-300

Specifications


- Valve must be installed in vertical position with the trim as shown. Any deviation may affect the proper operation of the valve. • Flange designed to EN1092-2 PN10/16, ANSI B16.1 Class 125 or
- BS10 Table D/E (Other types available on request). UL/ULC listed and GOST Certified.
- FM Approved (sizes through 6" / 150mm)
- Working pressure: Cold water, 300PSI, 200PSI or 250PSI available on request.
- Corrosion protection:
- Internally and externally fusion bonded epoxy powder $\mathsf{coated}\left(\mathsf{FBE}\right)$. Note:

Design and material are subject to change without notice.

material specifications					
No.	Part Name	Material ASTM Spec			
1	Body	Ductile Iron	A536 65-45-12		
2	Cover	Ductile Iron	A536 65-45-12		
3	Gasket	Rubber	EPDM		
4	Bolt	Carbon Steel	A307B		
5	Stem	Stainless Steel	AISI 304		
6	Spring	Stainless Steel	AISI 304		
7	Disc	Ductile Iron	A536 65-45-12		
8	Disc Ring	Rubber	EPDM		
9	Seat	Bronze	B62 C83600		
10	Retainer	Brass	B16 C36000		
11	Bolt	Stainless Steel	A2-70		

Material Specification

Schematic

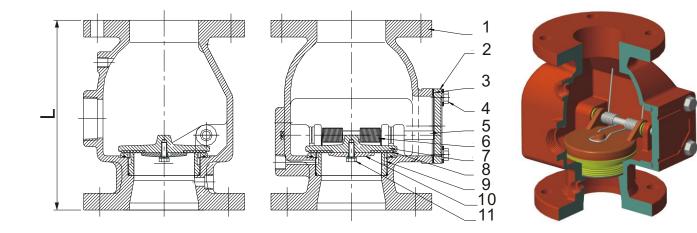

Dimensions (mm)

Size		DN80(3")	DN100(4")	DN150(6")	DN200(8")
L ·	(mm)	257	270	340	432
	(Inch)	10.12	10.63	13.39	17.01

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our products



Asia, Pacific:

WEFLO VALVE Ltd (China) Web: www. weflovalve. com E-mail: info@weflovalve. com

E-mail: info@weflo.com Web: www.weflovalve.com E-mail: info@weflovalve.com





Alarm Check Valve, Vertical Trim Flange Ends, 300PSI

Schematic of Valve with Accessories



Accessories

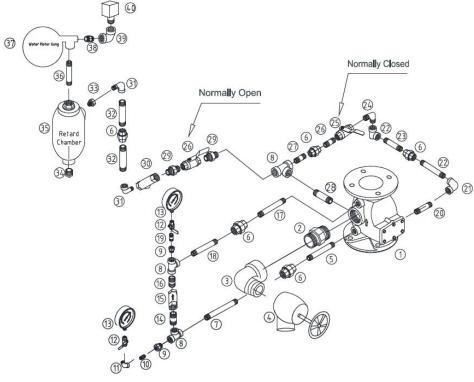


FIG · F1511-300

Material Specifications

Part No.	Specification	Material	
1	Valve	See Above	
2	2″ NPT Pipe Fitting	Malleable Iron	
3	2"NPT Street Elbows	Malleable Iron	
4	2" Angle Valve	Brass	
5	1/2"NPT Screwed Pipe	Carbon Steel	
6	1/2"Cone Union	Malleable Iron	
7	1/2"NPT Screwed Pipe	Carbon Steel	
8	1/2" Straight Tees	Malleable Iron	
9	1/2"x 1/4"Reducers	Malleable Iron	
10	1/4″ NPT Screwed Pipe	Carbon Steel	
11	1/4" 90° Elow	Malleable Iron	
12	1/4" Ball Valve	Brass	
13	Pressure Gauge		
14	1/2"NPT Screwed Pipe	Carbon Steel	
15	1/2" Check Valve	Brass	
16	1/2"NPT Screwed Pipe	Carbon Steel	
17	1/2"NPT Screwed Pipe	Carbon Steel	
18	1/2"NPT Screwed Pipe	Carbon Steel	
19	1/2"NPT Screwed Pipe	Carbon Steel	
20	1/2"NPT Screwed Pipe	Carbon Steel	
21	1/2" 90° Elbow	Malleable Iron	
22	1/2"NPT Screwed Pipe	Carbon Steel	
23	1/2"NPT Screwed Pipe	Carbon Steel	
24	1/2" 90° Elbow	Malleable Iron	
25	1/2" Ball Valve	Brass	
26	1/2"NPT Screwed Pipe	Carbon Steel	
27	1/2"NPT Screwed Pipe	Carbon Steel	
28	1/2"NPT Screwed Pipe	Carbon Steel	
29	1-2"NPT Pipe Fitting	Malleable Iron	
30	1-2"Y-Strainer	Brass	
31	1-2"90° Street Elbow	Malleable Iron	
32	1/2"NPT Screwed Pipe	Carbon Steel	
33	Pipe Fitting	AISI 304	
34	Plug 1	Brass	
35	Plug 2	Brass	
36	3/4"NPT Screwed Pipe	Carbon Steel	
37	Water Motor Gong		
38	3/4"NPT Screwed Pipe	Carbon Steel	
39	3/4"x 1/2"90°Reducing Elbow	Malleable Iron	
40	Pressure Switch		

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our products



 Americas:
 WEFLO VALVE LLC (USA)
 Web: www.weflo.com
 E-mail: info@weflo.com

 Europe, Middle East, Africa:
 WEFLO VALVE Ltd (EU)
 Web: www.weflovalve.com
 E-mail: info@weflovalve.com

 Asia, Pacific:
 WEFLO VALVE Ltd (China)
 Web: www.weflovalve.com
 E-mail: info@weflovalve.com

Tel:+ 1 -904-910-3902 Tel:+352 621 353 588 Tel:+ 86 532-87905016